




1. **Dual-Temp system**
2. **Big capacity countertop**
3. **Energy Saving**
4. **Easy Maintenance**



Principle

Bakers Rock H-Series electric model conveyor ovens, is composed of one or more stackable baking chambers and an optional stand. During baking, the product is placed on the stainless steel 304 conveyor belt and passes through two flows of hot air : **impingement technology** , the best system for heat distribution in the whole baking chamber for perfect baking of pizza, pastry, seafood, sandwiches, bagels, ethnic foods and more. Management of needed power is automatic according to the load.

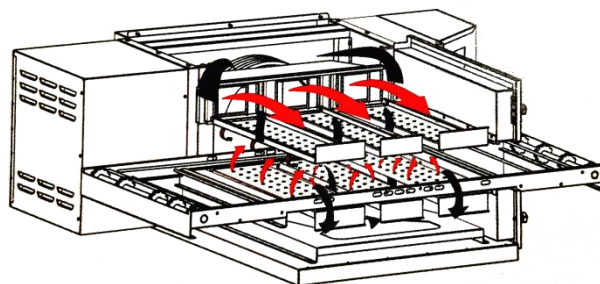

Standard Features

- Patented EMS Energy Management System reduces energy consumption and increases cooking efficiency
- Patented “Jet Sweep” impingement process that delivers constant heat to the chamber
- Adaptive power technology for that generate heat only when need (Eco-mode)
- Dual-temp control system for top and bottom , Max.320°C
- 16” (41cm) wide conveyor belt, 48”(121cm) long belt.
- 24” (61cm) long cooking chamber
- Stainless steel front, sides, top and interior
- Removeable front door
- 6” & 10” Extension Tray
- Floor space 1220*850mm
- Reversible conveyor direction
- Stackable up to three high.

Optional Features

- Stand with casters
- Extended warranty available

Conserves Energy

Unit incorporates a patented Energy Management System. QiangAn ovens provide very efficient heat transfer to product. Energy is conserved as air is recycled from heater to product, with minimum loss. Oven is cool to the touch.

Cleanability

H1624pro Ovens are designed for easy cleaning. Removable parts include: front door, crumb pans, end panels, air fingers, exit tray, conveyor belt.

Easily Services


Control compartment is designed for quick and easy access.

Warranty


2 years free parts and Lifelong online technical support.

Ventilation


Use of a ventilation hood is strongly recommended.

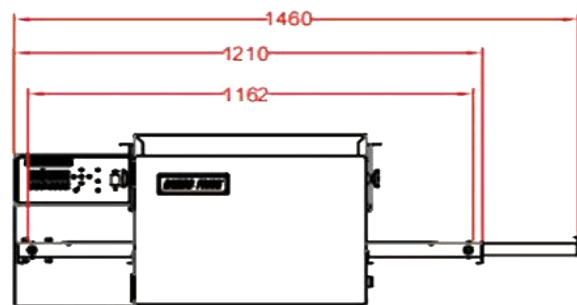


(Front)

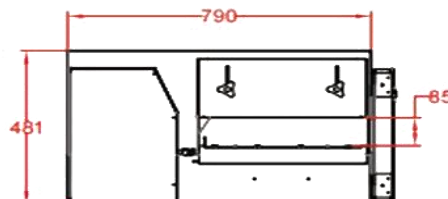

(Left)

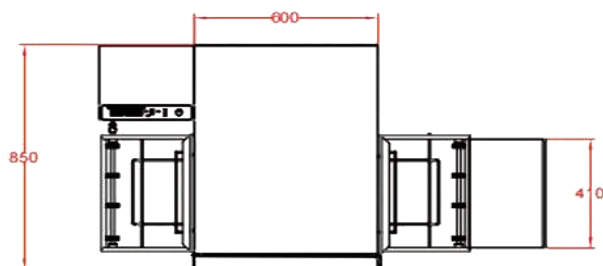

(Top)

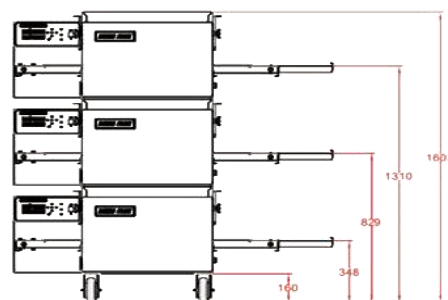

(Stack)

GENERAL INFORMATION

TYPE	VOLTAGE	PHASE	FREQUENCY	RATED HEAT INPUT	AMPERAGE				SUPPLY	BREAKERS
					L1	L2	L3	N		
H1624Pro	220V	1	50/60 Hz	6.8kW	30.0	-	-	30.0	2 pole 3 wire (L+ N+G)	As per local code
	208V	1	50/60 Hz		31.7	-	-	31.7	2 pole 3 wire (L+ N+G)	As per local code
	220V	3	50/60 Hz		17.3	17.3	17.3	-	3 pole 4 wire (3L+ G)	As per local code
	208V	3	50/60 Hz		18.3	18.3	18.3		3 pole 4 wire (3L+ G)	As per local code
	380V	3	50/60 Hz		9.6	9.6	9.6	1.8	4 pole 5 wire (3L+N+ G)	As per local code

* Ship Info. : Data of package with plywood case

* Capacity : 4m 50s bake time , 245°C , per hour , pizza or other round products

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.